

## Ribbon Microphone Transformer LL2913

LL2913 is identical to our ribbon microphone transformer LL2911, but (for manufacturing reasons) with a different pinout / winding phase.


**Turns ratio:**

1 + 1 + 1 + 1 : 37

**Dims: (Length x Width x Height above PCB (mm))**

30 x 22.5 x 14.5

**Pin Layout** (viewed from component side) **and winding schematic:**

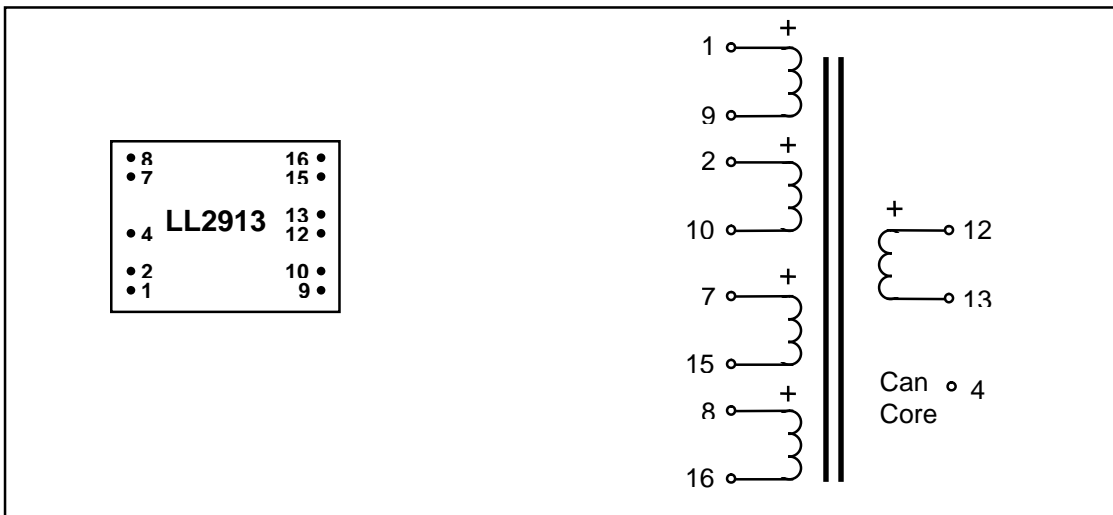

**Spacing between pins:**

2.54 mm (0.1")

**Spacing between rows of pins:**

22.86 mm (0.9")

**Weight:**

27 g

**Rec. PCB hole diameter:**

1.5 mm

**Housing:**

Mu metal

**Core:**

Amorphous strip core

**Static resistance of each primary (average):**

0.2 Ω

**Static resistance of secondary:**

59 Ω

