

Nixer RP64

Audio over IP Digital Patch Panel

A range of compact 64 input, 64 output 1RU 19" digital patch bays designed for Theatre, Fixed Instal and Broadcast and available for Dante or Ravenna networks.




Product Description

Based on the latest Nixer audio processor, the RP64 is a 64 input to 64 output digital Audio over IP 'patch' panel. Using an intuitive interface, it is possible to connect any input to any output. This facilitates the quick and easy re-patching of critical signals without the need of having to use a laptop and Dante Controller and the inherent delays this brings. The RP64 patching reconnection is near instantaneous.

RP64 Key Points

- Simple and Intuitive Operation to rapidly route critical signals from a dedicated operator/engineering position in the event of equipment failure
- 64 inputs, 64 outputs (@ 48kHz)
- No external laptop and cumbersome software patching
- Near instantaneous audio switching
- Large colour LCD touchscreen for quick and easy re-patching of critical signals
- Reset and recall route status from memory
- Compact 1RU design (less than 120mm deep) for deployment in any frame, desk or custom location
- PoE power or via external DC input for power redundancy
- Primary and Secondary network ports
- OSC control via RJ45 (under development, contact Sales for further information).
- Dante and Ravenna Versions available (Specified at time of purchase)

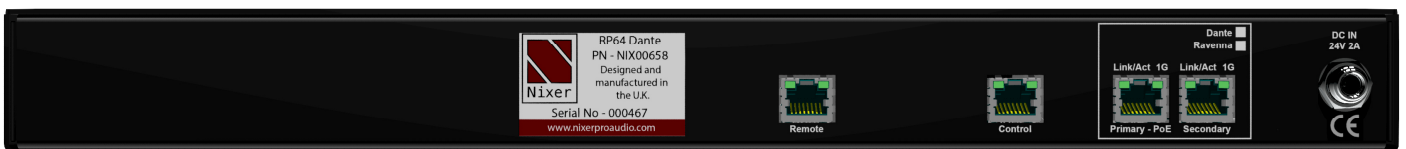

3 base configurations

- RP64 64 input, 64 output patch unit, front panel display
- RP64 EQ¹ 66 inputs with 2 band EQ, 68 output patch unit, front panel display, stereo line out and AES I/O
- RP64 CV2¹ 66 inputs with 2 band EQ, 68 output patch unit, no front panel display, stereo line out and AES I/O

Power to the RP64 can be either via PoE on the Primary RJ45 port and/or via the 24V DC power input. Using both PoE and the DC input enables power redundancy. Also, on the rear panel there is a secondary RJ45 port for either redundant or switched AoIP connections. In addition to this there is a Control port for controlling the RP64 via OSC and a Remote RJ45 port for use with optional hardware remotes.

¹ See individual datasheets for further details

Please Note, the remote port is not compatible with standard ethernet

Specifications RP64

1. Patching of up to 64 channels at 48kHz (32 channels at 96kHz)
2. Sample rates supported
 - a. 44.1kHz
 - b. 48kHz
 - c. 88.2kHz
 - d. 96kHz
3. Bit Depth supported
 - a. 16bit
 - b. 24bit
 - c. 32bit
4. Dante or Ravenna option - at time of purchase
5. AES67 compatible
6. SMPTE 2110 compatible
7. Fully compatible with New Dante Domain Manager (Dante option only)
8. 64 x 64 channel patch matrix (32 x 32 at 48kHz)
 - a. Patch input one to one output
 - b. Patch one input to many outputs
9. 64 channel meters
 - a. High resolution meters – 32 visible at a time
10. Dual 1Gbps RJ45 Dante inputs
 - a. 1Gbps or 100Mbps operation
 - b. User configurable for Switched or Redundant operation
 - c. Network configuration information available via menu
11. Power input via
 - a. PoE (13W) on Primary RJ45 connector
 - b. 2.1mm DC inputs socket for use with external 24V 2amp adaptor
 - c. Both power inputs can be active at the same time for redundancy
12. USB port is also used for product firmware updates
13. Wired remote control option on RJ45 connector
 - a. RS485 balanced TX and RX pairs
 - b. 5V feed to connected device (up to 200mA)
 - c. Note: this connector is not compatible with standard ethernet connectors
14. LCD
 - a. 6.6" (168mm) diagonal 24-bit colour LCD with 1440 x RGB x 240 resolution
 - b. LED backlight (adjustable brightness via software)
 - c. multi touch capacitive touch overlay with gesture support
15. Size
 - a. 494mm wide by 120mm deep by 44mm height
 - b. 1.0kg
16. 19inch rack mounting ears can be removed for desktop use



Dante® is a registered trademark of Audinate Pty Ltd.
Ravenna is an open technology standard from ALC Network GmbH

Ordering Information

Dante Patch & Ravenna Patch

RP64 Dante
NIX00658

RP64 Dante - 1U rack mounted 64 channel Dante patch unit - featuring a 64 input x 64 output electronic patch bay, large LCD display, PoE powered with redundant 24V DC input, redundant network connectors, AES67 compatibility, Remote RJ45 port, OSC control via separate Control RJ45 port - Harmonised Code: 8519890000

RP64 Ravenna
NIX00658R

RP64 Ravenna - 1U rack mounted 64 channel Ravenna patch unit - featuring a 64 input x 64 output electronic patch bay, large LCD display, PoE powered with redundant 24V DC input, redundant network connectors, AES67/SMPTE 2110 compatibility, Remote RJ45 port, OSC control via separate Control RJ45 port - Harmonised Code: 8519890000

Optional Extras
NIX00583
NIX00629

PoE PSU Kit - Power supply, blade kit and 2M RJ45 Cat6 flat cable

24V 1.5A Power adaptor 90-264VAC input with multi-blade adaptors. 2.5mm screw lock plug